

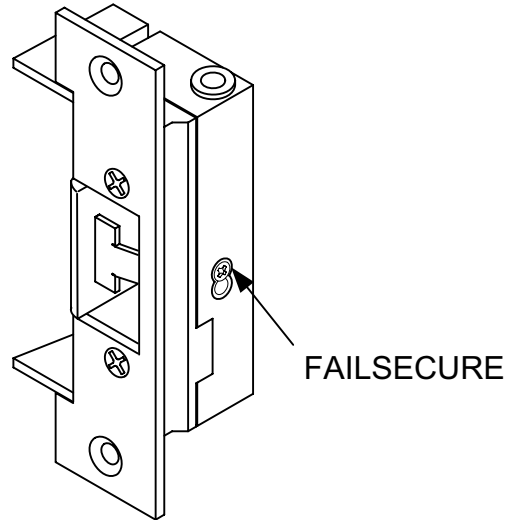



Failsecure standard. Field adjustable from Failsecure to Failsafe as shown.

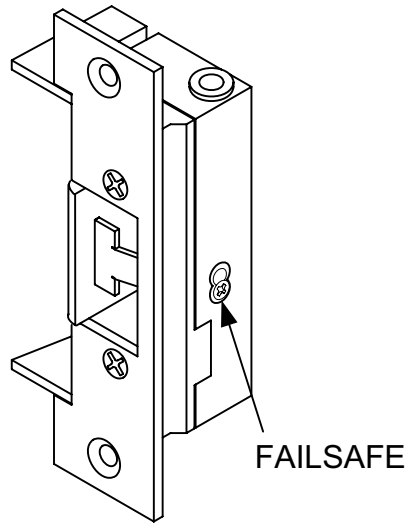

Typical Hollow Metal Frame

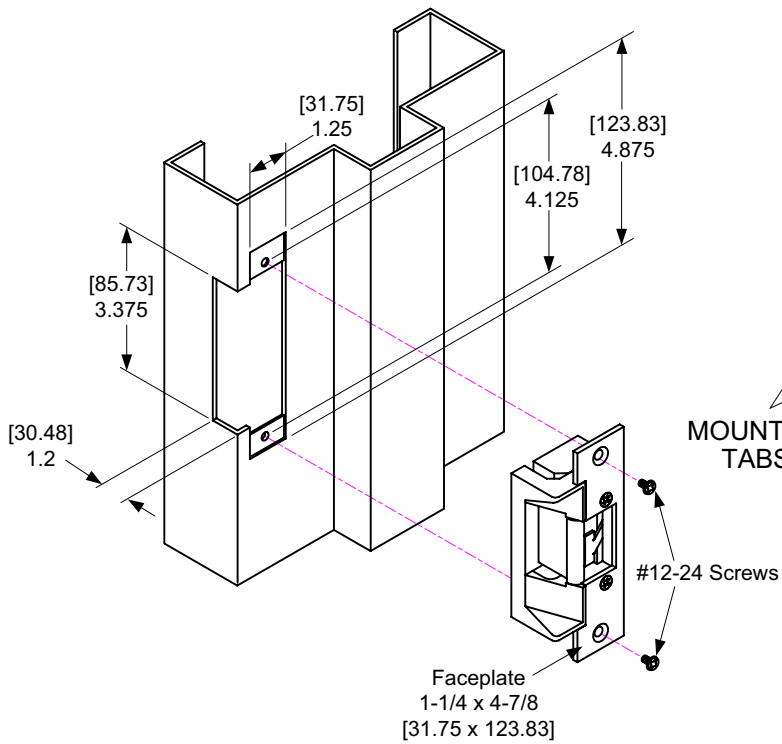

Typical Aluminum Frame

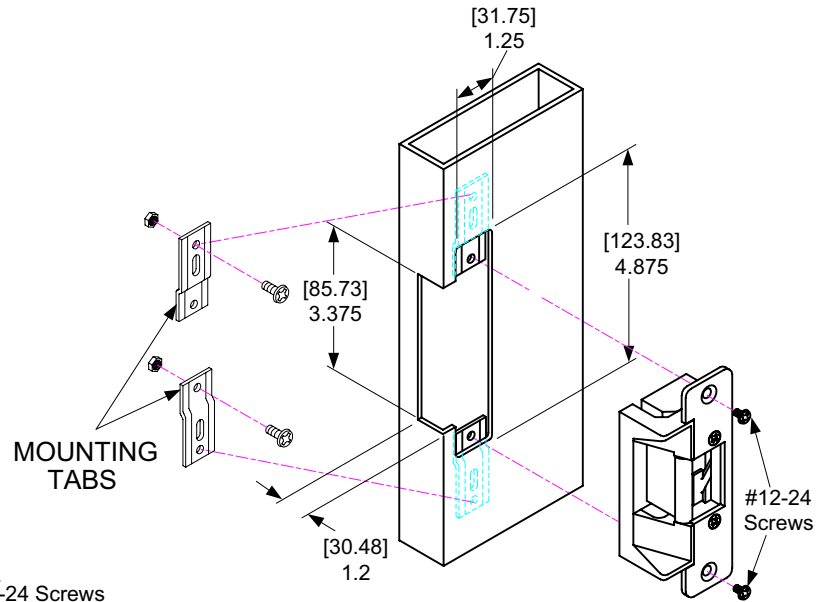


Electrical Data:

- Dual Voltage: 200/100mA @ 12/24VDC
140/70mA @ 12/24VAC

Latch Status: Orange - COM
White - N/O
Grey - N/C

Keeper-Open/Closed:
Wht/Blk - COM
Yel/Blk - N/O
Org/Blk - N/C

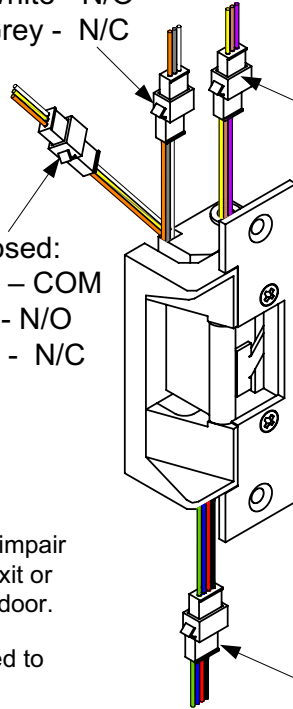

Monitoring:

- **Latch Status:** SDPT, dry 3Amp @ 30V (standard)
- **Keeper Closed and Deadlocked** (standard)
- **Keeper Open/Closed Status:** SPDT, Dry 3Amp @ 30V (optional)

Keeper/Deadlocked: Purple - COM
Brown - N/O
Yellow - N/C

Notes:

The electric door strike shall be installed in such a way as not to impair the operation of an emergency exit or panic hardware mounted on the door.


Wire leads must not be connected to conductors larger than 18AWG

12V		24V	
Red		Red	
Black		Black	
Blue		Blue	
Green		Green	


Solenoid: Black, Red, Blue & Green

Horizontal Adjustment

Remove Faceplate. Loosen Horizontal Adjustment Screws and slide Die Cast Body out as needed. Retighten Adjustment Screws and replace Faceplate.

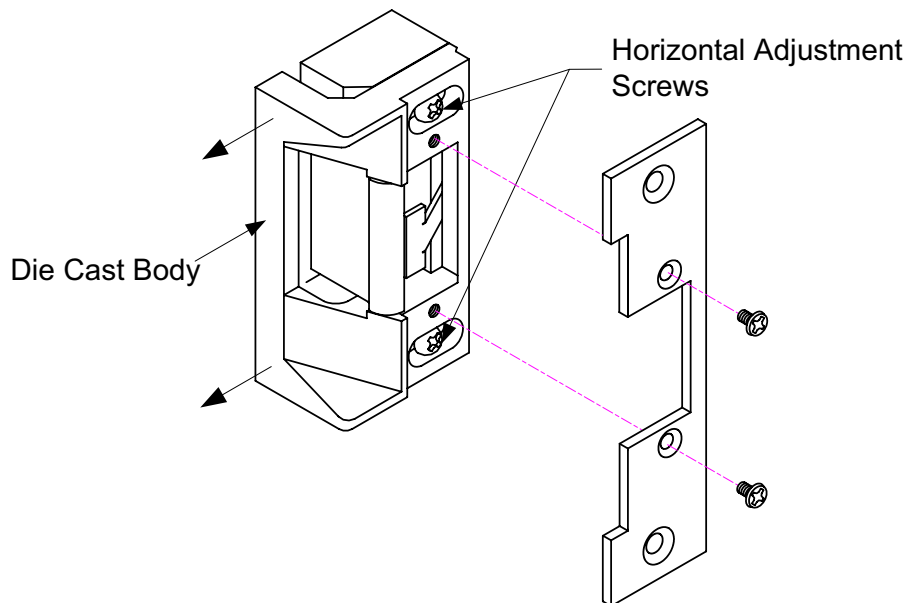

HOLLOW METAL, SQUARE CORNER FACEPLATE

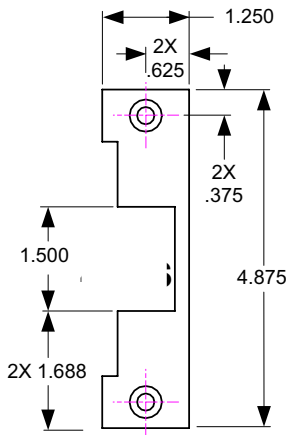

MATERIAL THICKNESS = .110

