Pamex Locks





WARRANTY


- Ten years mechanical warranty
- Five years finish warranty

CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes

Available Trims



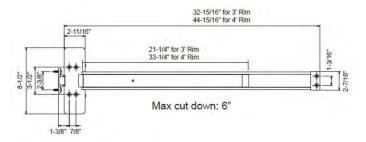

FEATURES & OPTIONS

Door Width For all doors up to 36" or 48" wide

Stile 4-1/4" minimum

Material Push bar is made of extruded anodize aluminum and spring is made of stainless steel

Dogging 1/4" turn, hex key dogging (non-fire rated only, E7000)

Strike For 5/8" stop, plus shim for 1/2" stop

Latch Bolts 3/4" throw, stainless steel

Dead Latch Bolts 5/8" stainless steel

Mounting Furnished standard with sheet metal & machine screws

Backset 2-3/4" standard

Handing Non-handed

Projection 2-1/2" maximum projection, 1-3/4" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model **# E7000** for standard exit opening. All exit devices shall be modern push pad type, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.

FINISHES

- □ Aluminum (Painted)
- □ Dark Bronze (Painted)
- □ Stainless Steel







Pamex Locks



Push bar is made of extruded anodize aluminum and spring is

FEATURES & OPTIONS

Fire Rated Rim Type Exit Device

For all doors up to 36" or 48" wide

For 5/8" stop, plus shim for 1/2" stop

Door Width

4-1/4" minimum

made of stainless steel

3/4" throw, stainless steel

Dead Latch Bolts 5/8" stainless steel

Stile

Material

Strike

Latch Bolts

Mounting

Backset 2-3/4" standard

Handing


Non-handed Projection



WARRANTY

- Ten years mechanical warranty
- Five years finish warranty




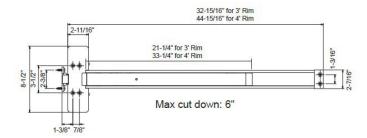

CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes
- UL 3 Hour Fire Rated

Available Trims



Exit by slight pressure on any point on the push bar at all time

2-1/2" maximum projection, 1-7/8" when depressed

Furnished standard with sheet metal & machine screws and SNB

SPECIFICATIONS

Exit Device: Exit device shall be by Pamex model # EF7000 for UL fire barrier doors. All exit devices shall be modern push pad type, non-handed and provided with thru bolts for proper installation. EF7000 is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.

FINISHES

- □ Aluminum (Painted)
- **Dark Bronze (Painted)**
- **Stainless Steel** \square



