


E7000V

Vertical Rod

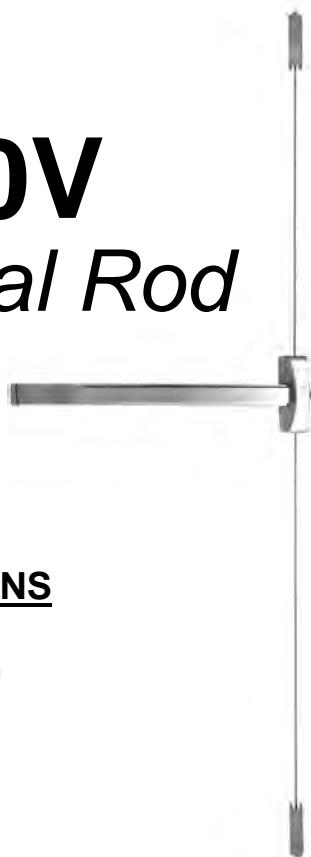

FEATURES & OPTIONS

Door Height

For all doors up to 7'0" or 8'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

4-1/4" minimum

Material

Push bar is made of extruded anodize aluminum and spring is made of stainless steel

Dogging

1/4" turn, hex key dogging (non-fire rated only, E7000)

Strike (Top & Bottom)

Top Strike: For 1/2" stop, plus shim

Top Latch

Latchbolt: 3/4" throw, stainless steel

Deadlatch: 1/2" throw, steel bolt

Bottom Latch

Latchbolt: 3/4" throw, stainless steel

Mounting

Furnished standard with sheet metal & machine screws

Backset

2-3/4" standard

Handing

Non-handed

Projection

2-1/2" maximum projection, 1-7/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

FINISHES

- ☐ Aluminum (Painted)
- ☐ Dark Bronze (Painted)
- ☐ Stainless Steel

WARRANTY

- Ten years mechanical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes

Available Trims



Heavy Duty
Lever Trim
(Handed)



Lever Trim



Knob Trim



Rim Cylinder
Single Pull



Rim Cylinder
Double Pull



Thumb Piece
Entry



Storeroom



Thumb Piece
Passage




Dummy



Pull Plate



Cover Plate

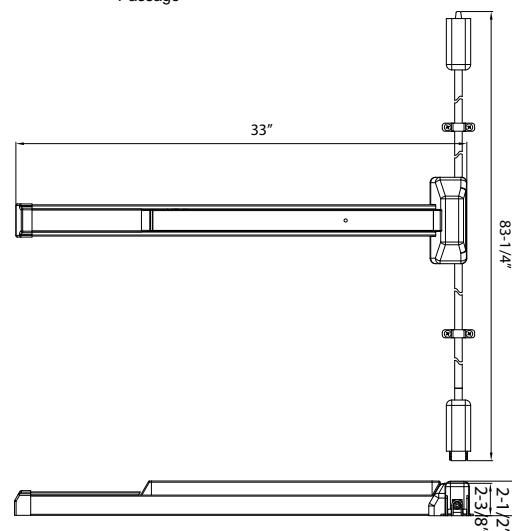


SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **E7000V** for standard exit opening. All exit devices shall be modern push pad type with vertical latching, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.

EF7000V

Vertical Rod

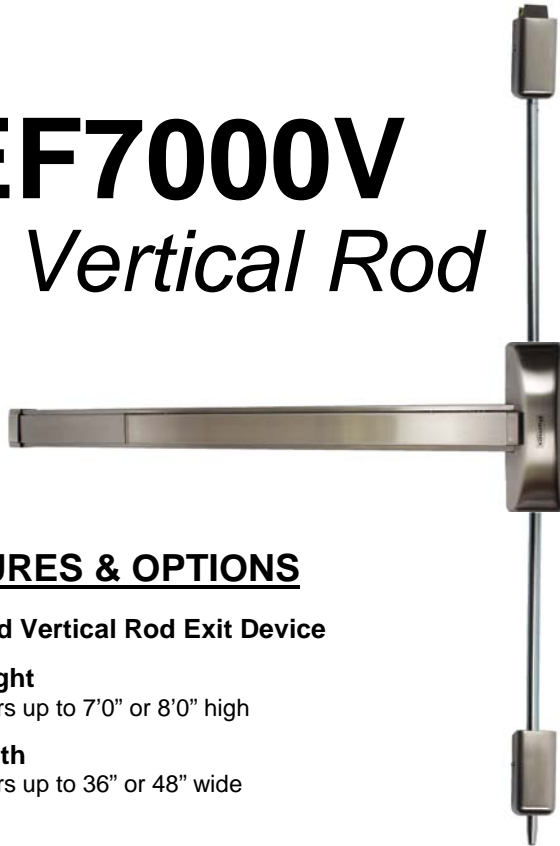

FEATURES & OPTIONS

Fire Rated Vertical Rod Exit Device

Door Height

For all doors up to 7'0" or 8'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

4-1/4" minimum

Material

Push bar is made of extruded anodize aluminum and spring is made of stainless steel

Strike (Top & Bottom)

Top Strike: for 1/2" stop, plus shim

Top Latch

Latchbolt: 3/4" throw, stainless steel

Deadlatch: 1/2" throw, steel bolt

Bottom Latch

Latchbolt: 1/2" throw, stainless steel

Mounting

Furnished standard with sheet metal & machine screws

Backset

2-3/4" standard

Handing

Non-handed

Projection

2-1/2" maximum projection, 1-7/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

FINISHES

- ☐ Aluminum (Painted)
- ☐ Dark Bronze (Painted)
- ☐ Stainless Steel

WARRANTY


- Ten years mechanical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes
- UL 3 Hour Fire Rated

Available Trims

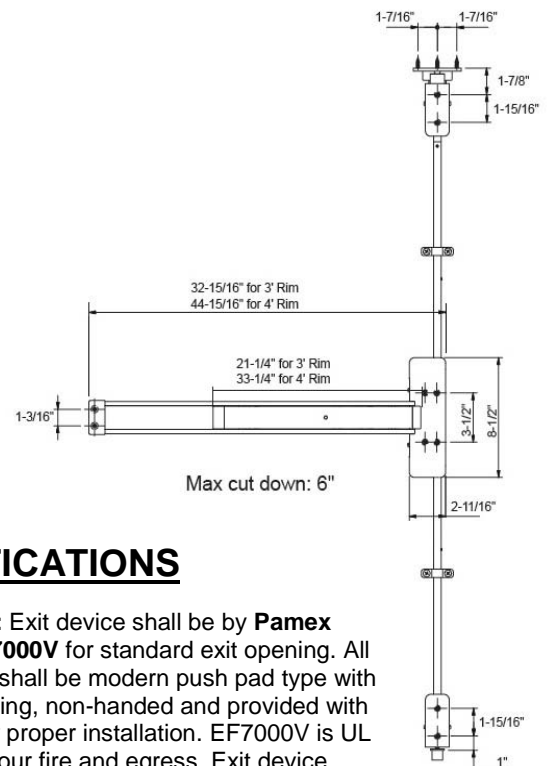

SPECIFICATIONS

Exit Device: Exit device shall be by Pamex model # EF7000V for standard exit opening. All exit devices shall be modern push pad type with vertical latching, non-handed and provided with thru bolts for proper installation. EF7000V is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.