

E9120V

Concealed Vertical Rod



FEATURES & OPTIONS

Door Height

For all doors up to 7'0" or 8'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

2-5/8" minimum for single doors and standard 5/8" stop

Material

Cover: Stainless steel, zinc

Cover Tube: Aluminum

End Cap: Zinc

Dogging

1/4" turn, hex key dogging (non-fire rated only, E9100)

Strike (Top & Bottom)

Stainless steel with plated rollers

Top Latch

1/2" throw, Pullman type with automatic dead-latching,

Stainless steel

Bottom Latch

1/2" throw, Pullman type, held retracted during door swing,

Stainless steel

Mounting

Furnished standard with wood, machine screws and thru-bolts

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

Electric Latch Retraction

Available with Electric Latch Retraction (ELR)

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **E9120V** for standard exit opening. All exit devices shall be modern push pad type with vertical latching, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

WARRANTY

Life-Time mechanical warranty

Five years finish warranty



CODE COMPLIANCE

ANSI A156.3, Grade 1

UL listed for Panic and UL10C, UBC 7-2-1997


codes

AVAILABLE TRIMS



E9100

Escutcheon
Lever Trim

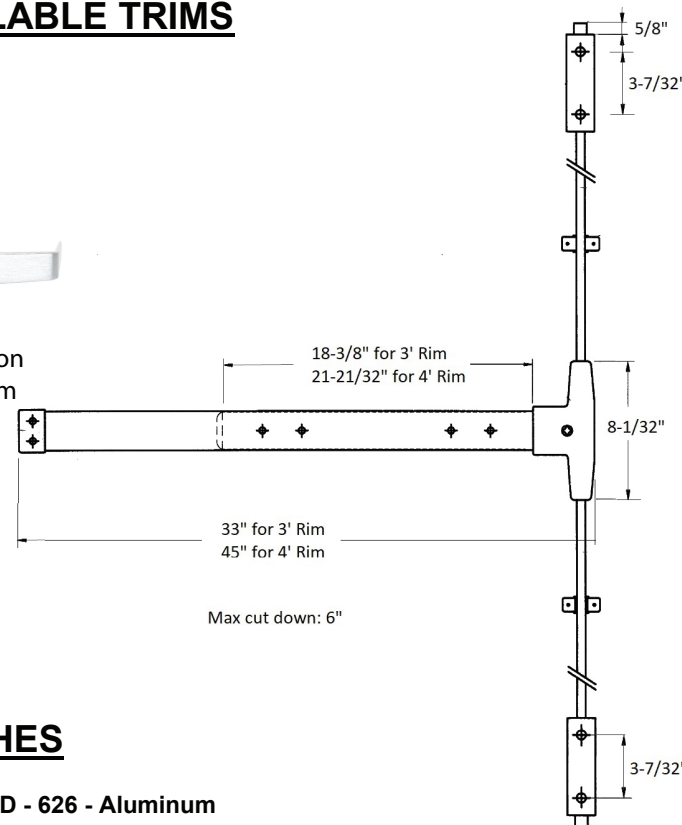

FINISHES

- US26D - 626 - Aluminum
- US10B - 695 - Dark Bronze
- US32D - 630 - Stainless Steel
- 313 - 622 -Black

EF9120V

Concealed Vertical Rod



FEATURES & OPTIONS

Door Height

For all doors up to 7'0" or 8'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

2-5/8" minimum for single doors and standard 5/8" stop

Material

Cover: Stainless steel, zinc

Cover Tube: Aluminum

End Cap: Zinc

Dogging

No dogging on fire rated devices

Strike (Top & Bottom)

Stainless steel with plated rollers

Top strike mortised into frame

Top Latch

1/2" throw, Pullman type with automatic dead-latching,

Stainless steel

Bottom Latch

1/2" throw, Pullman type, held retracted during door swing,

Stainless steel

Mounting

Furnished standard with wood, machine screws and thru-bolts

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

Electric Latch Retraction

Available with Electric Latch Retraction (ELR)

SPECIFICATIONS

Exit Device: Exit device shall be by Pamex model # EF9120C for standard exit opening. All exit devices shall be modern push pad type with vertical latching, non-handed and provided with thru bolts for proper installation. EF9120C is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

WARRANTY

Life-Time mechanical warranty

Five years finish warranty



CODE COMPLIANCE

ANSI A156.3, Grade 1

UL listed for Panic and UL10C, UBC 7-2-1997

codes


UL 3 Hours Fire Rated

AVAILABLE TRIMS



E9100

Escutcheon
Lever Trim

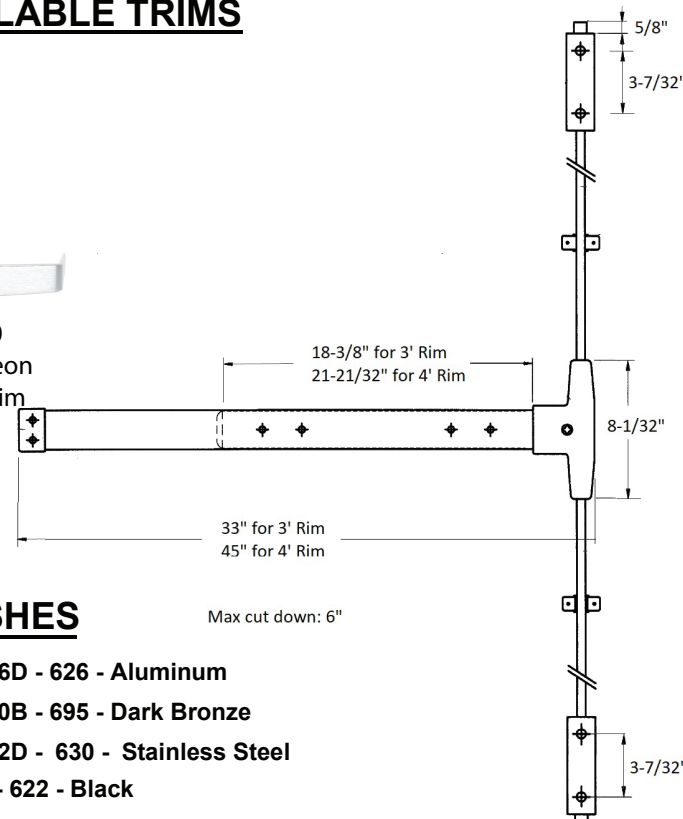

FINISHES

- US26D - 626 - Aluminum
- US10B - 695 - Dark Bronze
- US32D - 630 - Stainless Steel
- 313 - 622 - Black