

EF7000LBR

Less Bottom Rod



FEATURES & OPTIONS

Fire Rated Less Bottom Rod Exit Device

Door Height

For all doors up to 7'0" or 8'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

4-1/4" minimum

Material

Push bar is made of extruded anodize aluminum and spring is made of stainless steel

Strike (Top Only)

Top Strike: for 1/2" stop, plus shim

Top Latch

Latchbolt: 3/4" throw, stainless steel

Deadlatch: 1/2" throw, steel bolt

Fire Bolt

Auxiliary spring loaded latchbolt, when exposed to fire latchbolt releases keeping the door closed and regulated

Mounting

Furnished standard with sheet metal & machine screws

Backset

2-3/4" standard

Handing

Non-handed

Projection

2-1/2" maximum projection, 1-7/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

FINISHES

- ☐ Aluminum (Painted)
- ☐ Dark Bronze (Painted)
- ☐ Stainless Steel

WARRANTY

Ten years mechanical warranty

Five years finish warranty





CODE COMPLIANCE

ANSI A156.3, Grade 1

UL listed for Panic and UL10C, UBC 7-2-1997 codes

UL 3 Hour Fire Rated

Available Trims

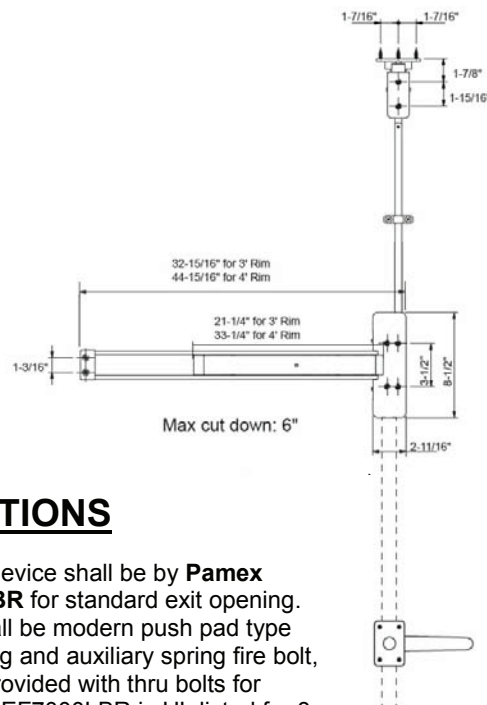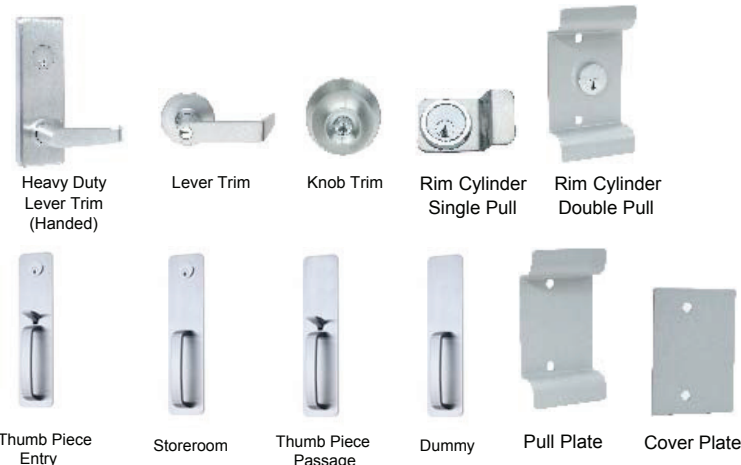

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **EF7000LBR** for standard exit opening. All exit devices shall be modern push pad type with vertical latching and auxiliary spring fire bolt, non-handed and provided with thru bolts for proper installation. EF7000LBR is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.