

Concealed Screws Stainless Steel Grab Bar

Model: BGBSS-1212C, 1218C, 1224C, 1230C
1232C, 1236C, 1242C, 1248C

Features

- Material: 304 Satin Stainless Steel Bar
- Concealed Screw Surface Mount Application
- Bar Wall Thickness: 0.050" (18 Gauge)
- Flange Wall Thickness: 0.073" (14 Gauge)
- 3" Diameter Mounting Flange with 3 Hole Mounts
- 2" Stainless Steel Mounting Screws
- 1-1/2" Wall Clearance
- Meet ADA requirements and tested to withstand 300 lbs when installed properly





Available Size

- | | | | |
|------------------------------|------------------------------|------------------------------|------------------------------|
| <input type="checkbox"/> 12" | <input type="checkbox"/> 18" | <input type="checkbox"/> 24" | <input type="checkbox"/> 30" |
| <input type="checkbox"/> 32" | <input type="checkbox"/> 36" | <input type="checkbox"/> 42" | <input type="checkbox"/> 48" |

Available Finish

- ☐ Stainless Steel

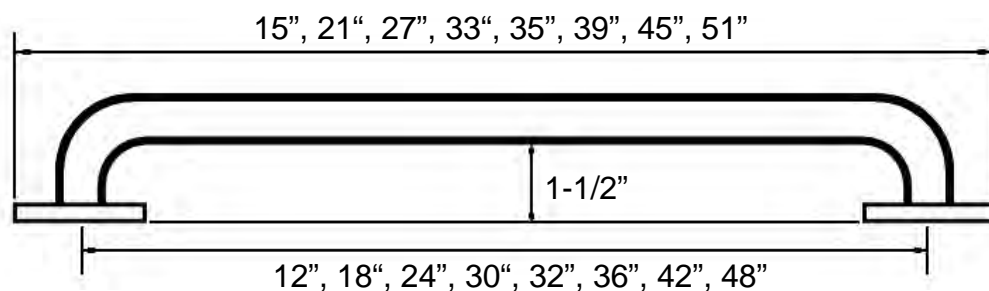

Exposed Screws Stainless Steel Grab Bar

Model: BGBSS-1212E, 1218E, 1224E, 1230E
1232E, 1236E, 1242E, 1248E

Features

- Material: 304 Satin Stainless Steel Bar
- Exposed Screw Surface Mount Application
- Bar Wall Thickness: 0.050" (18 Gauge)
- Flange Wall Thickness: 0.073" (14 Gauge)
- 3" Diameter Mounting Flange with 3 Hole Mounts
- 2" Stainless Steel Mounting Screws
- 1-1/2" Wall Clearance
- Meet ADA requirements and tested to withstand 300 lbs when installed properly





Available Size

- | | | | |
|------------------------------|------------------------------|------------------------------|------------------------------|
| <input type="checkbox"/> 12" | <input type="checkbox"/> 18" | <input type="checkbox"/> 24" | <input type="checkbox"/> 30" |
| <input type="checkbox"/> 32" | <input type="checkbox"/> 36" | <input type="checkbox"/> 42" | <input type="checkbox"/> 48" |

Available Finish

- ☐ Stainless Steel

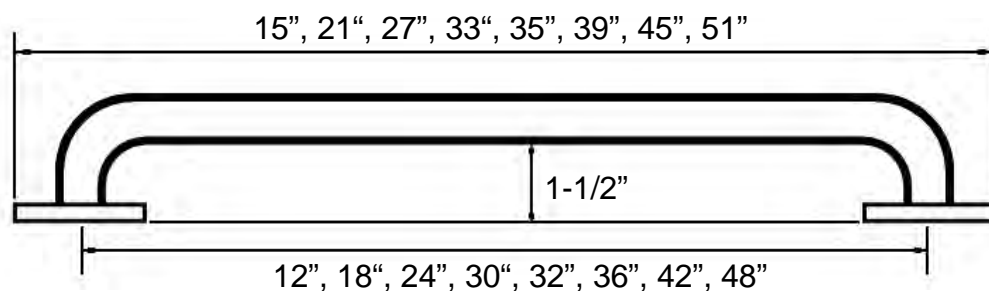

Concealed Screws Stainless Steel Peened Grab Bar



Model: BGBSS-1218P, 1224P, 1236P, 1242P

Features

- Bulk Pack with Poly Bag and Head Card
- Textured Satin
- Type 304 Satin Stainless Steel Bar with 0.050" Wall Thickness (18 Gauge)
- Mounting Flange with 0.073" Wall Thickness (14 Gauge)
- Flanges are 3" Diameter with 3 Hole Mounts
- 2" Stainless Steel Mounting Screws
- 1-1/2" Wall Clearance
- Concealed Flange Covers are "Snap and Twist" Type
- Meet ADA requirements and tested to withstand 300 lbs when installed properly



Available Size

- ☐ 18" ☐ 24" ☐ 36" ☐ 42"



Available Finish

(other finishes available upon request with lead-time)

- ☐ Stainless Steel



Poly Bagged w/ Head Card

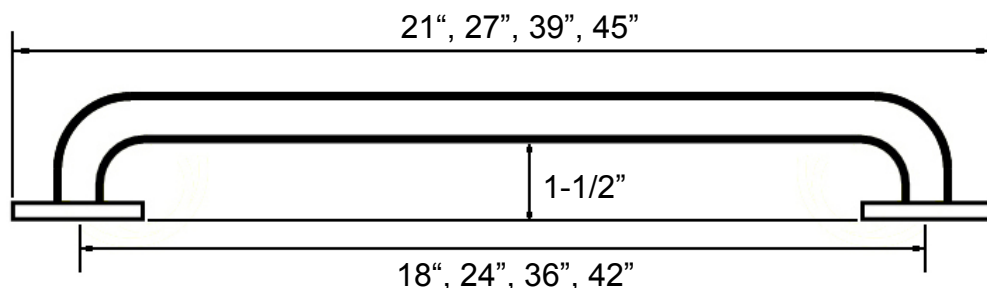

Stainless Steel Swing-Up Grab Bar

Model: BGBSS-1430SWP



Features

- Type 304 Satin Stainless Steel Bar with 0.05" Wall Thickness (18 Gauge)
- 1-1/4" Diameter Tube Bar
- Down Dimension: 30" W (front to back) x 10-3/16" H
- Back Plate measures 3-1-16" W x 10-3/16" H
- Back Plate – 3/16" Thickness
- Operate with less than 5 lbs. of force
- 300 lbs. weight limit
- Textured Satin
- Meet ADA requirements when installed properly
- Not to be mounted on drywall, sheetrock, plaster, fiber, acrylic, or any other similar hollow wall surface without appropriate wood or steel-backing material

