

# ASPEN

## *PTL Series*



### FEATURES & OPTIONS

#### **Door Preparation**

Cross Bore: 2-1/8", Edge: 1"

#### **Latch Backset**

Exterior: Adjustable deadlatch standard  
Interior: Adjustable plainlatch standard  
(other options available)

#### **Faceplate**

1" x 2-1/4" round corner standard  
(other options available)

#### **Bolt**

1/2" throw

#### **Door Thickness**

Fit 1-3/8" to 1-3/4" standard

#### **Cylinder**

5-pin KW keyway solid brass cylinder standard

#### **Strike Plate**

2-1/4" x 1-3/4" round corner full lip standard  
(other options available)

#### **Handing**

Non-Handed

#### **Material**

Zinc die-cast lever

#### **ANSI/BHMA**

A 156.2 Grade 3

### FINISHES

(other finishes available upon request with lead-time)

- ☐ **US3 – 605 – Polished Brass**
- ☐ **US5 – 609 – Antique Brass**
- ☐ **US10B – 613 – Oil Rubbed Bronze**
- ☐ **US15 – 619 – Satin Nickel**
- ☐ **US12P – 716 – Dark Bronze**

### WARRANTY

- ☐ **25-year mechanical warranty**
- ☐ **Five years finish warranty**

### FUNCTIONS

#### **Entry – F109 (PTL00)**

Both levers locked or unlocked by key outside or turn-piece inside.

#### **Passage – F75 (PTL30)**


Both levers always free.

#### **Privacy – F76 (PTL10)**

Both levers locked or unlocked by turn-piece inside. Outside lever unlocked by coin or screwdriver.

#### **Half Dummy (PTL40)**

For doors where only pull is required.

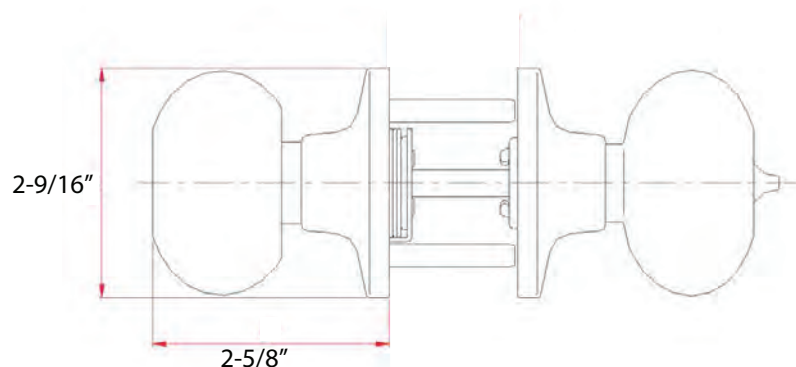

\*\* Entry Function Knobset \*\*