# Pamex Locks

# E9300/9350 Mortise Exit Device



# **FEATURES & OPTIONS**

### Function

□ E9300 – Entry & Passage

- E9350 Storeroom
- Door Width

For all doors up to 36" or 48" wide

Stile 4-1/4" minimum with standard 5/8" stop

### Material

Cover: Stainless steel, zinc Cover Tube: Aluminum End Cap: Zinc

### Dogging

1/4" turn, hex key dogging (non-fire rated only, E9300/9350)

### Strike

Universal curved lip, non-handed

### Latch Bolts

Stainless steel two-piece mechanical 3/4" with anti-friction insert and auxiliary deadlocking latch

### Mounting

Furnished standard with wood, machine screws and thru-bolts

Backset 2-3/4" standard

Handing Non-handed

**Projection** 3" maximum projection, 2-5/8" when depressed

**Operation** Exit by slight pressure on any point on the push bar at all time

# **SPECIFICATIONS**

**Exit Device:** Exit device shall be by **Pamex** model **# E9300** for standard exit opening. All exit devices shall be modern push pad type, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

# **FINISHES**

US26D - 626 - Satin Chrome

## WARRANTY

- Life-Time mechanical warranty
- Five years finish warranty




## **CODE COMPLIANCE**

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes

## AVAILABLE TRIMS



E9300 Escutcheon Lever Trim

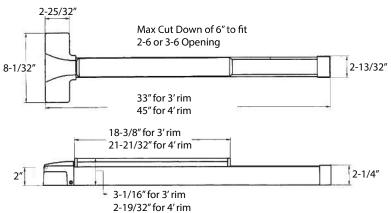

# Pamex Locks

# EF9300/9350

Fire Rated Mortise Exit Device

# FEATURES & OPTIONS

### Function

□ EF9300 – Entry & Passage

EF9350 – Storeroom

Door Width

For all doors up to 36" or 48" wide

Stile

4-1/4" minimum with standard 5/8" stop

### Material

Cover: Stainless steel, zinc Cover Tube: Aluminum End Cap: Zinc

Strike Universal curved lip, non-handed

### Latch Bolts

Stainless steel two-piece mechanical 3/4" with anti-friction insert and auxiliary deadlocking latch

### Mounting

Furnished standard with wood, machine screws and thru-bolts

## Backset

2-3/4" standard

#### Handing Non-handed

**Projection** 3" maximum projection, 2-5/8" when depressed

### Operation

Exit by slight pressure on any point on the push bar at all time

# **SPECIFICATIONS**

**Exit Device:** Exit device shall be by **Pamex** model **# EF9300** for UL fire barrier doors. All exit devices shall be modern push pad type, non-handed and provided with thru bolts for proper installation. EF9000 is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

# **FINISHES**

□ US26D – 626 – Satin Chrome



# WARRANTY

- Life-Time mechanical warranty
- Five years finish warranty

### **CODE COMPLIANCE**

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes
- UL 3 Hours Fire Rated

# **AVAILABLE TRIMS**



E9300 Escutcheon Lever Trim

