

# Cambridge FL3B Series



### FEATURES & OPTIONS

#### Latch Backset

Exterior: Adjustable UL deadlatch standard  
Interior: Adjustable UL plainlatch standard  
(other options available)

#### Faceplate

1" x 2-1/4" round corner standard  
(other options available)

#### Bolt

1/2" throw

#### Door Thickness

Fit 1-3/8" to 1-13/16" standard

#### Cylinder

6-pin SC "C" keyway solid brass cylinder standard

Also available in:

5-pin KW keyway

6 & 7-pin small format interchangeable core

#### Strike Plate

1-3/4" x 2-1/4" full lip round corner standard  
(other options available)

#### Handing

Reversible for right or left handed doors

### SPECIFICATIONS

**Lockset:** Lock or latchset shall be by **PAMEX** model # **FL3B Series**. All locks shall provide with 3 hour rated solid brass plain or deadlatch. Lock chassis shall have individual springs for lever return to prevent lever sag.

### FINISHES

(other finishes available upon request with lead-time)

- US3 – 605 – Polished Brass
- US5 – 609 – Antique Brass
- US10B – 613 – Oil Rubbed Bronze
- US15 – 619 – Satin Nickel
- US19 – 622 – Matte Black
- US26D – 626 – Satin Chrome

### CODE COMPLIANCE

- Meets ANSI/BHMA A156.2, Series 4000, Grade 2
- Meets ADA Requirements
- UL 3-Hour Fire Rated

### WARRANTY

- Lifetime mechanical warranty
- Five years finish warranty



### FUNCTIONS

#### Entry

Outside lever locked or unlocked by key outside or **turn-piece** inside. Inside always free.

#### Privacy

Outside lever locked or unlocked by **turn-piece** inside or by a coin or screwdriver outside. Inside always free.

#### Passage

Both levers always free.

#### Communicating Passage

Blank plate outside. Inside lever always unlocked.

#### Half Dummy

Single dummy trim for pull only.

#### Double Dummy


Double dummy trim for both sides of the door.

#### Storeroom

Outside lever always fixed and unlocked by key only. Inside lever always free.

#### Classroom

Outside lever locked or unlocked by key. Inside lever always free.

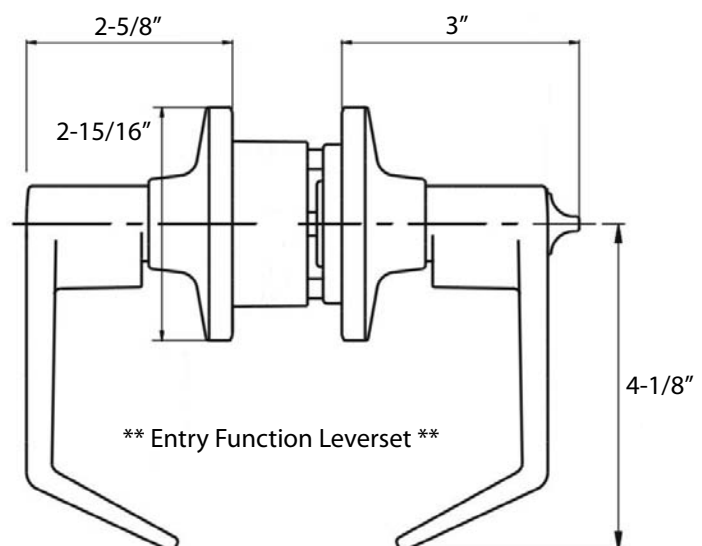

# Cambridge FL3C Series



Push Button Interior

### FEATURES & OPTIONS

#### Latch Backset

Exterior: Adjustable UL deadlatch standard  
Interior: Adjustable UL plainlatch standard  
(other options available)

#### Faceplate

1" x 2-1/4" round corner standard  
(other options available)

#### Bolt

1/2" throw

#### Door Thickness

Fit 1-3/8" to 1-13/16" standard

#### Cylinder

6-pin SC "C" keyway solid brass cylinder standard

Also available in:

5-pin KW keyway

6 & 7-pin small format interchangeable core

#### Strike Plate

1-3/4" x 2-1/4" full lip round corner standard  
(other options available)

#### Handing

Reversible for right or left handed doors

### SPECIFICATIONS

**Lockset:** Lock or latchset shall be by **PAMEX** model # **FL3C Series**. All locks shall provide with 3 hour rated solid brass plain or deadlatch. Lock chassis shall have individual springs for lever return to prevent lever sag.

### FINISHES

(other finishes available upon request with lead-time)

- US15 – 619 – Satin Nickel
- US26D – 626 – Satin Chrome
- US10B – 613 – Oil Rubbed Bronze
- US19 – 622 – Matte Black

### CODE COMPLIANCE

- Meets ANSI/BHMA A156.2, Series 4000, Grade 2
- Meets ADA Requirements
- UL 3-Hour Fire Rated

### WARRANTY

- Lifetime mechanical warranty
- Five years finish warranty



### FUNCTIONS

#### Entry

Outside lever locked or unlocked by key outside or **push-button** inside. Inside always free.

#### Privacy

Outside lever locked or unlocked by **push-button** inside or by a coin or screwdriver outside. Inside always free.

